


MODEL NUMBER	486 EWB 225A-E	504 EWB 225A-E	522 EWB 225A-E	540 EWB 225A-E	558 EWB 225A-E	576 EWB 225A-E
Kilowatts	486	504	522	540	558	576
Input - MBtu/h	1660	1720	1780	1840	1900	1970
Nominal gallons storage	225	225	225	225	225	225
A Boiler water supply *	4" Flange	4" Flange	4" Flange	4" Flange	4" Flange	4" Flange
B Boiler water return *	4" Flange	4" Flange	4" Flange	4" Flange	4" Flange	4" Flange
Shipping weight	1000	1010	1020	1030	1040	1050
Operating weight	2870	2880	2890	2900	2910	2920

* Flanges are rated at 150#. For voltage and electrical connections, see form 34-653. For equipment listing, see form 34-646.

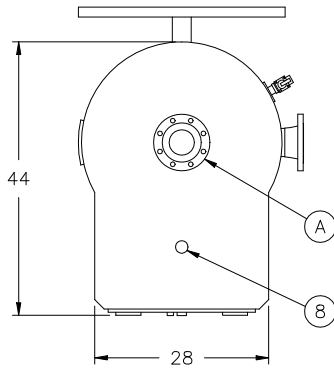

DRAWING CALL OUTS:


1. Controls and electrical enclosure
2. Dial pressure and temperature gauges
3. Control switch and fuse
4. Handhole cleanout
5. ASME-rated safety valve
6. Blowdown - 1" NPT
7. 3" I-Beam skid
8. Electrical entry



NOTES:

80 watts/in² elements are standard. For boilers with 40 watts/in² elements, substitute FWB for EWB in the model number. The kilowatts and model number prefix will be reduced to one-half that of 80 watts/in² models.

RIVERSIDE HYDRONICS RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.

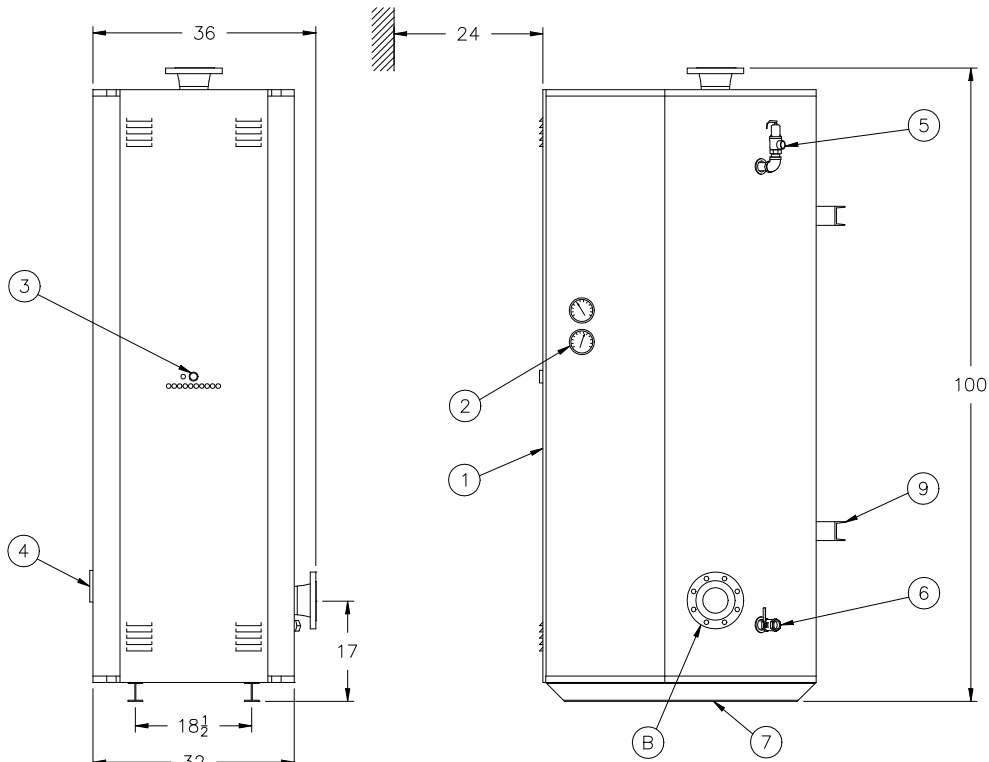

MINIMUM CLEARANCE

6" FROM SIDES, REAR AND TOP, 24" FROM FRONT.
ADDITIONAL CLEARANCE FOR SERVICE IS RECOMMENDED.