



Storage Tanks for Hot Water Supply Boilers ASME, Vertical, Polymer-lined, Non-insulated

| Model No. | Gallons Storage | Dimensions in Inches | | | | Circulating Connections for HWS Boiler NPT ① | Water Inlet and Outlet Connections NPT | Drain Valve Fitting NPT | Approx. Shipping Weight lbs |
|------------|-----------------|----------------------|-----|----|----|--|--|-------------------------|-----------------------------|
| | | A | B | C | D | | | | |
| V 225A-PN | 225 | 30 | 81 | 16 | 38 | 3 | 2 | 1 | 740 |
| V 250A-PN | 250 | 30 | 85 | 16 | 38 | 3 | 2 | 1 | 770 |
| V 300A-PN | 300 | 39 | 70 | 16 | 38 | 3 | 2 | 1 | 1070 |
| V 400A-PN | 400 | 39 | 82 | 16 | 38 | 3 | 2 | 1 | 1200 |
| V 475A-PN | 475 | 39 | 96 | 16 | 38 | 3 | 3 | 2 | 1360 |
| V 500A-PN | 500 | 49 | 74 | 17 | 39 | 3 | 3 | 2 | 1510 |
| V 600A-PN | 600 | 49 | 86 | 17 | 39 | 3 | 3 | 2 | 1670 |
| V 750A-PN | 750 | 60 | 80 | 21 | 43 | 3 | 3 | 2 | 2050 |
| V 900A-PN | 900 | 60 | 92 | 21 | 43 | 3 | 3 | 2 | 2280 |
| V 1000A-PN | 1000 | 60 | 104 | 21 | 43 | 3 | 3 | 2 | 2510 |
| V 1250A-PN | 1250 | 70 | 94 | 21 | 43 | 3 | 3 | 2 | 3490 |
| V 1500A-PN | 1500 | 70 | 106 | 21 | 43 | 3 | 3 | 2 | 3820 |
| V 1750A-PN | 1750 | 70 | 130 | 21 | 43 | 3 | 3 | 2 | 4480 |
| V 2000A-PN | 2000 | 70 | 142 | 21 | 43 | 3 | 3 | 2 | 4820 |
| V 2500A-PN | 2500 | 70 | 154 | 21 | 43 | 3 | 3 | 2 | 5140 |
| V 3000A-PN | 3000 | 70 | 178 | 21 | 43 | 3 | 3 | 2 | 5800 |

① Connecting multiple water heaters or HWS boilers to the same tank may require additional circulation fittings. Dimensions are in inches unless otherwise noted.

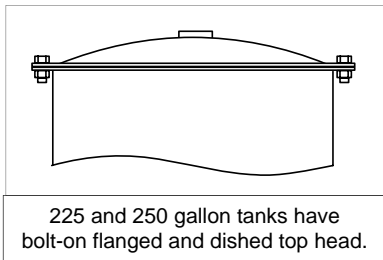

Tank sizes 1000, 1500, 1750, 2000, 2500 and 3000 include horizontal shipping skids (not shown).

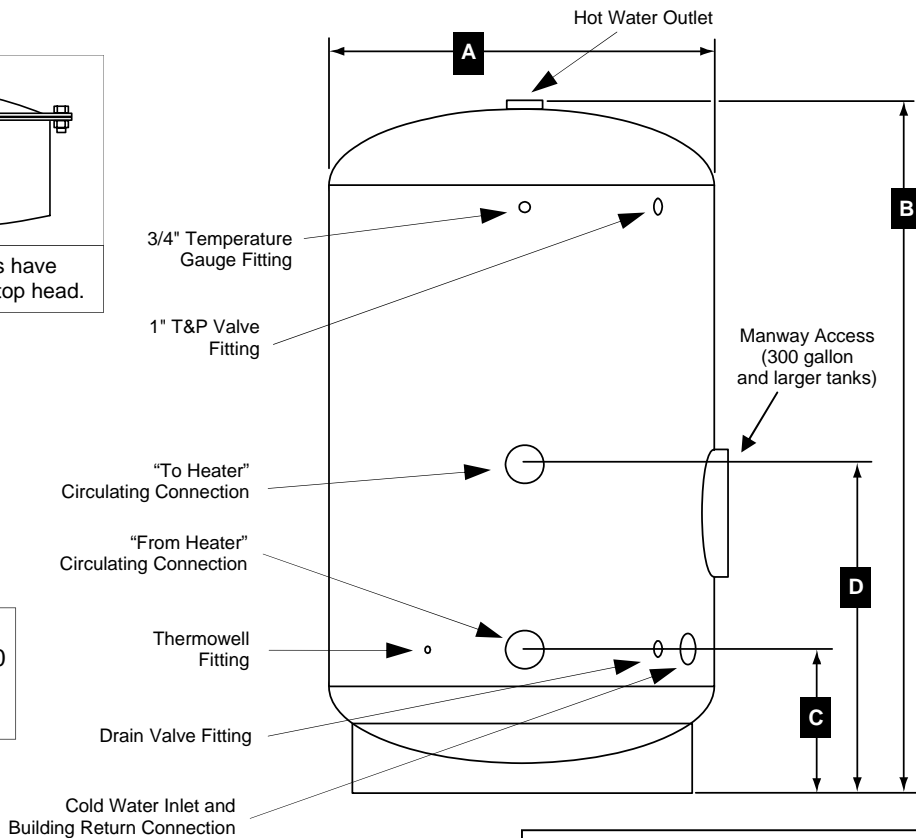

Specifications and dimensions may change without notice.